



福建省南安市泉益电子器材有限公司

地址：福建省南安市丰州武荣工业区B7幢

电话：0595-86781963

传真：0595-86785963

电子邮件：qyt@qyt-cn.com





无线话咪BT-89 SPEAKER MICROPHONE

说明

产品清单

BT-89 无线话咪	1
BT-89 适配器	1
Mini USB 充电器	1
USB专用充电线	1
产品使用手册	1

面板说明

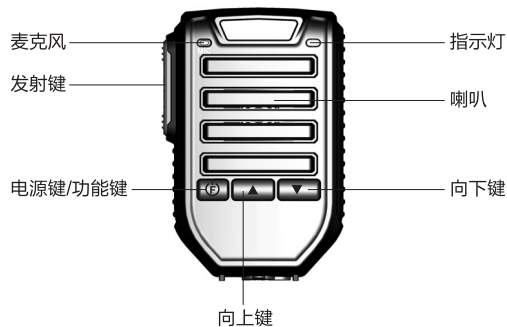

基本操作

- 1. 开机:** 按下功能键F 6秒, BT-89开机红蓝灯闪亮, 英语提示已开机, 蓝灯闪烁 (或红灯闪烁)。
- 2. 关机:** 开机状态下按BT-89功能键 [F] 6秒, 红蓝灯闪亮, 英语提示已关机。
- 3. 配对:** 最佳距离1米范围内
BT-89适配器, 接入设备开机后, 蓝灯闪烁, 约1分钟后红蓝灯交替闪烁, 此时手咪开机状态下 (闪红灯) 按功能键F连续两次, 手咪红蓝灯交替闪烁, 适配器与手咪进入对码状态, 几秒后蓝灯闪烁配对连接成功。
- 4. 音量调节:** 按 [▲] 键调节音量增大, 按 [▼] 键调节音量减小。

基本信息

- 1. 红灯闪烁:** 手咪和适配器未配对连接
- 2. 蓝灯闪烁:** 手咪和适配器已配对连接
- 3. 红蓝交替闪烁:** 手咪和适配器进入对码状态
- 4. 手咪红灯亮:** 手咪内置电池充电进行中
- 5. 手咪蓝灯亮:** 手咪内置电池已充满

产品参数

产品型号: BT-89
频率范围: 2.4GHz
使用范围: 10米内
电池容量: 1400mAh
通话时间: 50小时
充电输入: 5V (500mAh)
工作温度: -10°C - 45°C



Fujian Nanan Quan Yi Electronic Co., Ltd

Add: B7 Building, Wurong Industrial Area,
FengZhou, Nanan, Fujian, China.

Tel: +86-595-86781963

Fax: +86-595-86785963

E-mail: qyt@qyt-cn.com





BT-89 HANDHELD WIRELESS MICROPHONE & SPEAKER

Manual

UNIT CONTAIN

BT-89 Wireless microphone	1
BT-89 Adaptor	1
Mini USB Charger	1
USB charging cable	1
User Manual	1

PANEL DESCRIPTION

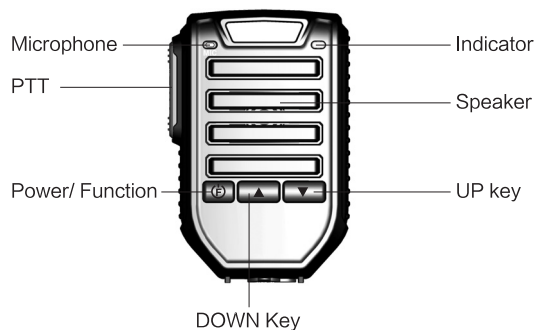

MAIN OPERATION

- 1. Turn On:** Hold on Function Key [F] for 6 seconds, indicator flash blue/red light, voice prompt.
- 2. Turn Off:** Hold on Function Key [F] for 6 seconds, indicator flash blue/red light, voice prompt.
- 3. Match:** Optimum distance within 1 meter.
Connect BT-89 with machine by adaptor and turn on the BT-89.
Press BT-89 [F] Key twice enter match code model. BT-89 indicator turn blue after match success.
- 4. Volume adjustment:** Press [▲] and [▼] to adjust volume.

INDICATOR INFORMATION

- 1. Flash red light :** No match.
- 2. Flash blue light:** Match success.
- 3. Red/Blue light alternative:** Match code model.
- 4. Red light:** Battery charging.
- 5. Blue light:** Battery finish charging.

SPECIFICATION

Model: BT-89

Frequency: 2.4 GHz

Range: 10 Meter

Battery capability: 1400 mah

Work time: 50 hours

Input: 5V (500mAh)

Temperature: -10℃ - 45 ℃